

HR200M2UP

PRODUCT FEATURE SUMMARY


DATE: 24.10.2025

Username: Torkil Hesthammer

MODEL TYPE: HR200M2UP

CNSORDERNO (Order number)	HR200M2UP
MF (Mounting Flange)	omit: SAE A, two holes
DC (Displacement code)	200: 12.19 in ³ /rev [199,8 cm ³ /rev]
SE (Shaft Extensions)	M : ø25 straight, Parallel key A8x7x32 DIN 6885
PT (Port type)	2: side ports, 2x 1/2, G1/4
SSV (Shaft Seal Version)	U: High pressure shaft seal
CV (Check Valves)	omit: Without check valves
DP (Drain Port)	omit: with drain port
SFMS (Special Features Measure speed)	omit: no special features
SFGWS (Special Features of gear wheel set)	omit: no special features
SFDR (Special Features - Direction of rotation)	omit: Standard
OP (Option (Paint))	P: Paint
INFO (INFO)	PDF catalog
L (INCH)	5.523
L1 (INCH)	1.090

DATA SHEET



Type		
Displacement, cm³/rev [in³/rev]		11.95 [195,8]
Max. Speed, [RPM]	cont.	306
	Int.*	383
Max. Torque, lb-in [daNm]	cont.	3097 [35,0]
	Int.*	3640 [41,1]
Max. Output, HP [kW]	cont.	11.7 [8,7]
	Int.*	14.3 [10,7]
Max. Pressure Drop, PSI [bar]	cont.	1885 [130]
	Int.*	2250 [155]
Max. Oil Flow, GPM [lpm]	cont.	15.9 [60]
	Int.*	19.8 [75]

Type		
Max. Inlet Pressure, PSI [bar]	cont.	2030 [140]
	Int.*	2540 [175]
	peak**	3260 [225]
Max. Return Pressure with Drain Line PSI [bar]	cont.	2030 [140]
	Int.*	2540 [175]
	peak**	3260 [225]
Pressure with Unloaded Shaft, PSI [bar]		145 [10]
Min Starting Torque, lb-in [daNm]	at max. press. drop cont.	2370 [26,8]
	at max. press. drop Int.*	2910 [32,9]
Min. Speed***, [RPM]		10
Weight, lb [kg]		15.87 [7,2]

* Intermittent operation: the permissible values may occur for max. 10% of every minute.

** Peak load: the permissible values may occur for max. 1% of every minute.





*** For speeds lower than given, consult factory or your regional manager.

- Intermittent speed and intermittent pressure drop must not occur simultaneously.
- Recommended filtration is per ISO cleanlines code 20/16. A nominal filtration of 25 micron or better.
- Recommend using a premium quality, anti-wear type mineral based hydraulic oil HLP(DIN51524) or HM (ISO 6743/4).
If using synthetic fluids consult the factory for alternative seal materials.
- Recommended minimum oil viscosity 13 mm²/s [70 SUS] at 50°C [122°F].
- Recommended maximum system operating temperature is 82°C [180°F].
- To assure optimum motor life fill with fluid prior to loading and run at moderate load and speed for 10-15 minutes.

HR200M2UP

3d generated view

To see model in 3D you should use Acrobat Reader with enable 3D view

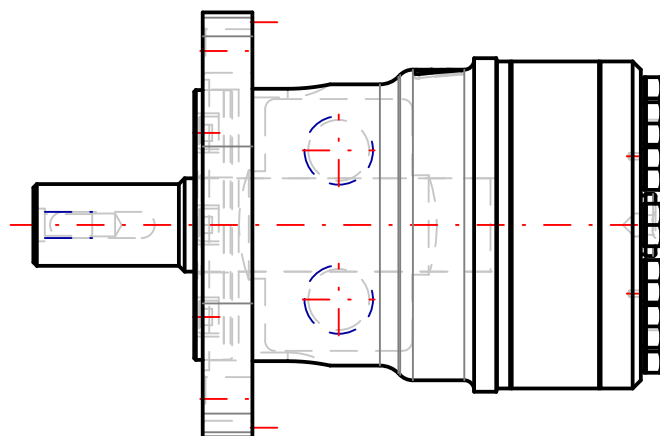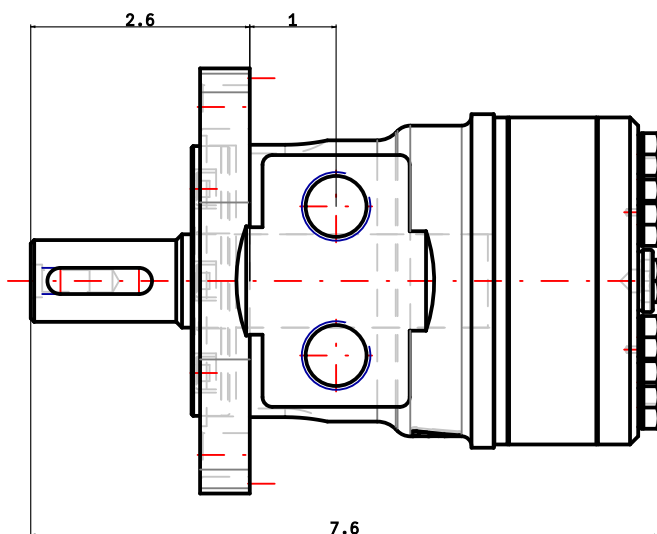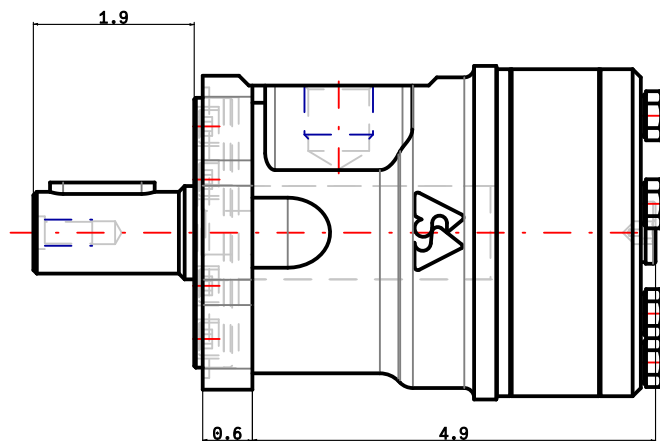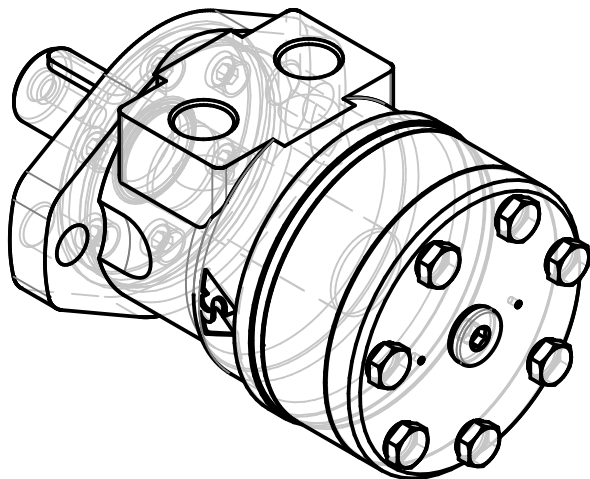

NOTE: Showed dimensions are in nominal, for maximal values see table.

NOTE: For additional dimensions and information about flange , shaft , endcover , etc. see next page.

L max	LS max
5.523	


Confidential property of M+S Hydraulic, Bulgaria.
Please note that this drawing is automatically generated based on the selection. In case of possible changes or revisions in the drawing specifications, the selection process should be repeat M+S is not responsible for any possible errors on the drawings.



HR200M2UP

Design: M+S Check:


Scale	Sheet	Rev.	Weight
Date 24.10.2025			15.87 [7,2]




Standard Rotation
Viewed from Shaft End

Port A Pressurized - CW
Port B Pressurized - CCW

omit: SAE A, two holes

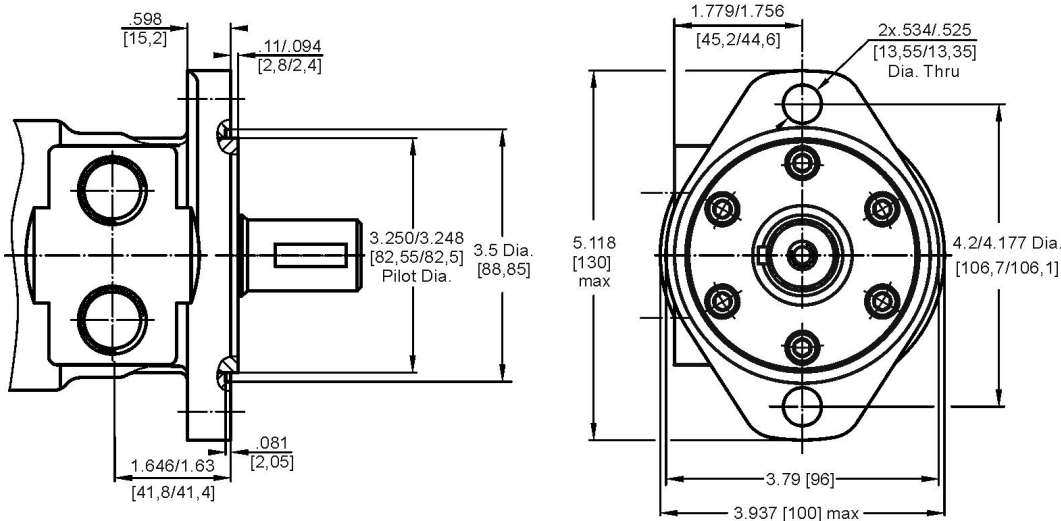

2: side ports, 2x 1/2, G1/4

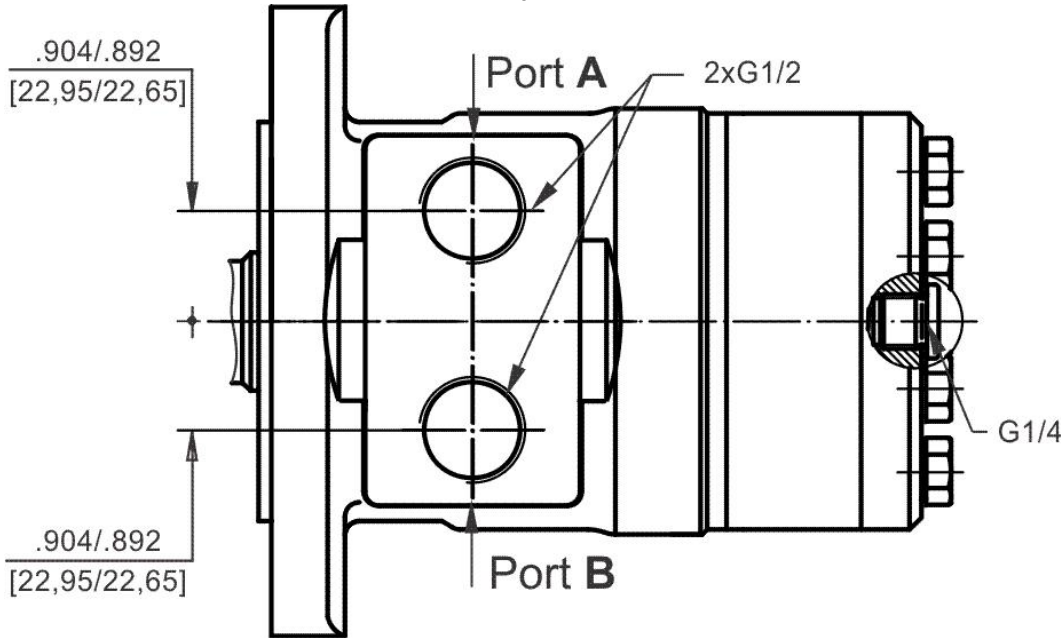

error


Confidential property of M+S Hydraulic, Bulgaria.
Please note that this drawing is automatically
generated based on the selection. In case of
possible changes or revisions in the drawing
specifications, the selection process should be
repeat M+S is not responsible for any possible
errors on the drawings.

Design: M+S Check:




HR200M2UP

Scale	Sheet	Rev.	Weight
Date 24.10.2025			15.87 [7,2]




HR200M2UP

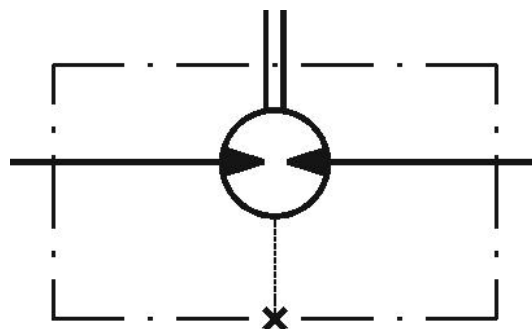

Hydraulic scheme without check valves and with drain port

FUNCTION DIAGRAMS

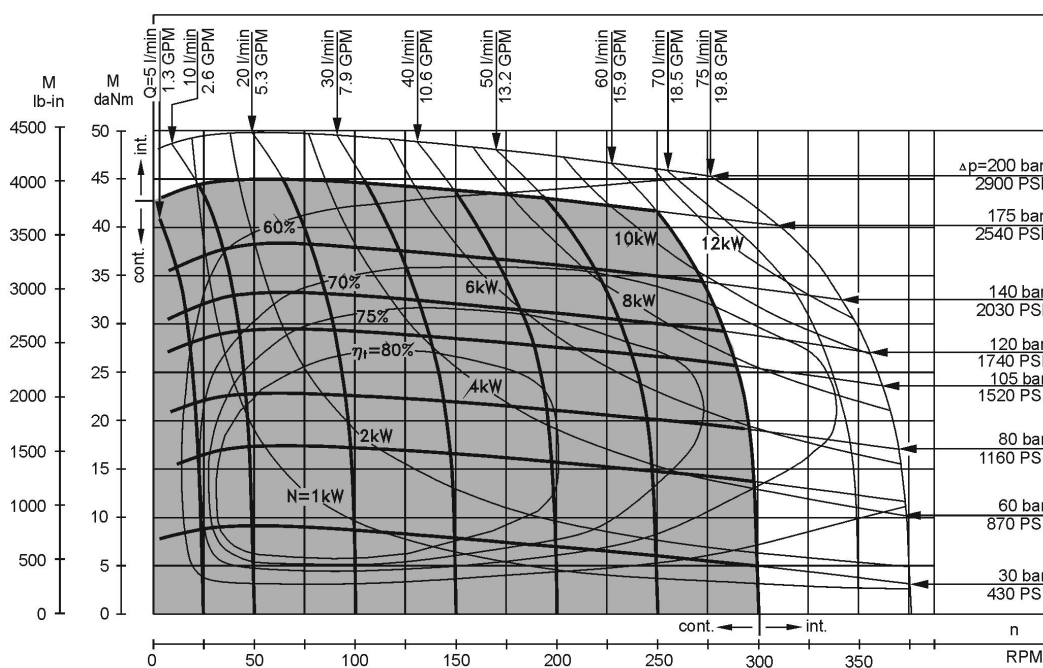


The function diagrams data is for average performance of randomly selected motors at back pressure 5÷10 bar [72.5÷145 PSI] and oil with viscosity of 32 mm²/s [150 SUS] at 50°C [122°F].

HR200M2UP

DATA SHEET

Pressure Losses

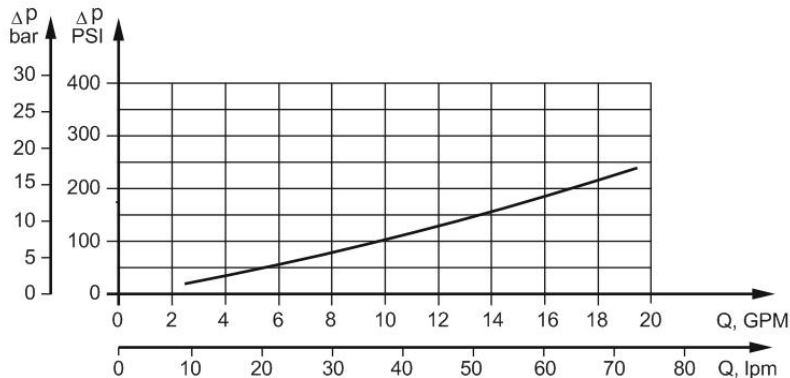


Oil flow in drain line

Pressure drop bar [PSI]	Viscosity mm ² /s [SUS]	Oil flow in drain line lpm [GPM]
1450 [100]	98 [20]	.660 [2,5]
	164 [35]	.476 [1,8]
2030 [140]	98 [20]	.925 [3,5]
	164 [35]	.740 [2,8]


MAX. PERMISSIBLE SHAFT SEAL PRESSURE

Max. return pressure without drain line or max. pressure in the drain line

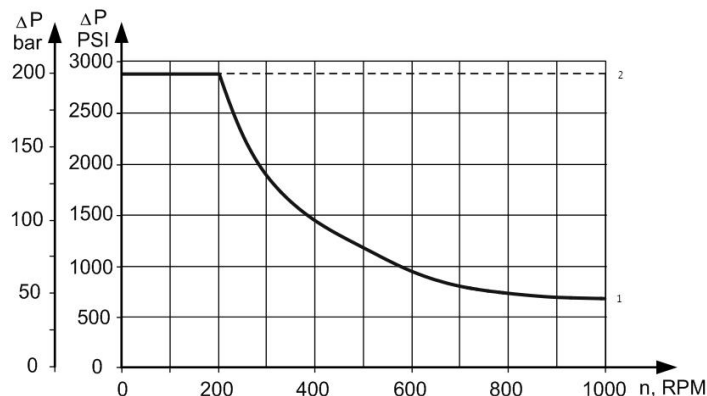

Black Curve shows continuous operations.
Dashed Curve shows intermittent operations.

PERMISSIBLE SHAFT LOADS

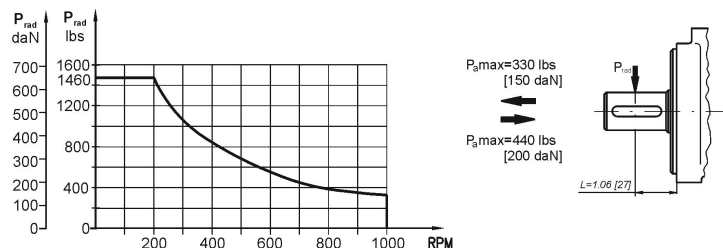

The permissible radial shaft load depends on the speed RPM and distance from the point of load to the mounting flange..