HYDRANOR

MODULAR WINCH UNITS

VB25/30 for nominal flow up to 240/450 lpm

Winch control manifolds for fixed pumps

- Pipe mounted model
- Compact design
- Load control valve of spool design
- Actuations
  - Manual
  - Hydraulic remote
  - Combination of those above
- Options for
  - Brake release valve
  - Remote operated pressure relief A - B for tension control

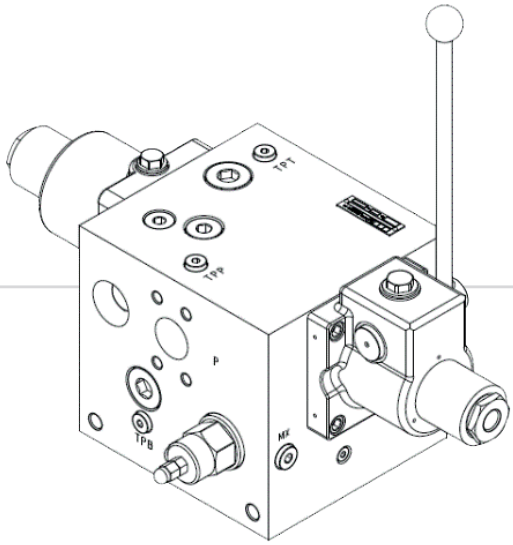

DESCRIPTION		DATA
Flow ranges	25	240 l/min
	30	450 l/min
Weight	25	37 kg
	30	
Max pressure	P, T, A, B	207 bar
	L	10 bar
Pilot pressure		8-30 bar
Test pressure		350 bar
Fluid temperature range		-20°C to +70°C
Ambient temperature range		-20°C to +50°C

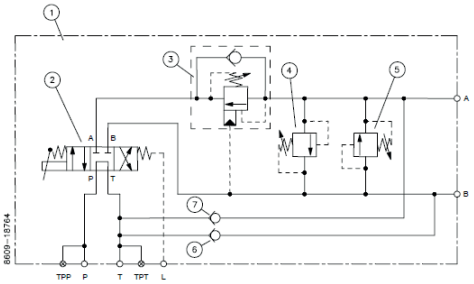

Figure 3 VB25 Hydraulic Diagram, manual operated directional valve.

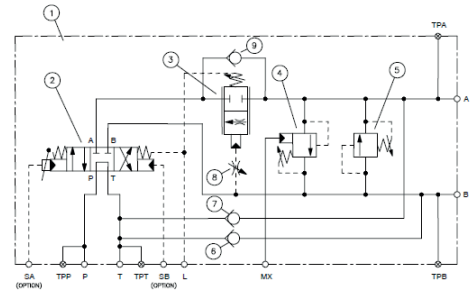

Figure 4 VB30 Hydraulic Diagram, hydraulic remote controlled main directional valve

SERVI GROUP
post@servi.no

WWW.SERVI.NO